



THUNDER PRECISION RESISTORS



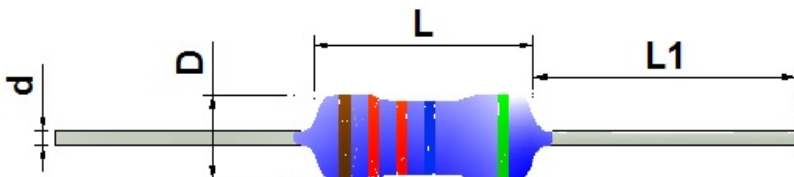
BS EN ISO9001:2008 FM51927

PRECISION METAL FILM RESISTORS

精密金属膜电阻器

HIGH PRECISION METAL FILM RESISTORS

高精精密金属膜电阻器

Type	RJ72	RJ73	RJ74	RJ16	RJ17	RJ18	型号	
Standard	SLC005-1995; GB5729-2003; SJ/T10571/10572/10573/10574-1994; GJB244-A-2001(IEC 60115)						执行标准	
Resistance range	0.1Ω to 10MΩ						阻值范围	
Resistance tolerance	W(±0.05%);B(±0.10%); C(±0.25%); D(±0.5%); F(±1%);J(±5.0%)						精度	
Stability	0.50%						稳定度等级	
Temperature coefficient	C7(±5ppm/℃); C6(±10ppm/℃); C5(±15ppm/℃); C3(±25ppm/℃); C2(±50ppm/℃)						温度系数	
Rated dissipation P_{70}	0.16W	0.25W	0.50W	1.0W	2.0W	3.0W	P_{70} 70℃ 以下额定功率	
Max. operating voltage U_{max}	200V	250V	300V	350V	450V	500V	U_{max} 最大工作电压	
Max short time over load voltage	400V	500V	600V	700V	900V	1000V	最大短时间过载电压	
Operating temperature range	-55℃ to 125℃						工作温度范围	
Insulation voltage	≥300V	≥500V	≥500V	≥500V	≥700V	≥700V	绝缘耐压	
Insulation resistance	≥1GΩ						绝缘阻抗	
Dimension	±0.5mm	L=3.3, D=1.6	L=6, D=2.5	L=9, D=3.2	L=11 D=4.2	L=15, D=4.8	L=24, D=8	±0.5mm
	±0.1mm	d=0.45	d=0.60	d=0.60	d=0.8	d=0.8	d=0.8	±0.1mm
Outlooks								外观
Minimun tape packing quantity	10000	5000	2500	1000	1000	1000	最小编带包装数量	

www.thunder-resistor.com

sales@thunder-resistor.com