



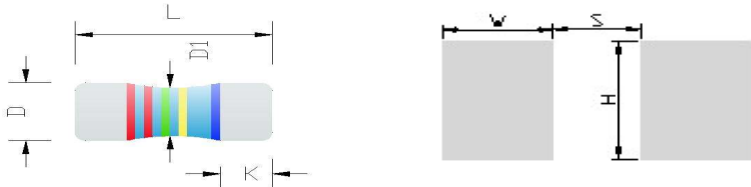
THUNDER PRECISION RESISTORS



PRECISION METAL FILM MELF RESISTORS WITH HIGH STABILITY

高稳定性精密电阻器

COATED TYPE

Type	RJM73U		RJM74U		型号
Metric type	DIN: 0204		DIN: 0207		德国工业标准型号
Resistance range	22Ω to 332kΩ		10Ω to 560kΩ		阻值范围
Resistance tolerance	W(±0.05%); B(±0.10%); C(±0.25%);				精度
Temperature coefficient	C7(±5ppm/°C); C6(±10ppm/°C); C5(±15ppm/°C);				温 度 系 数
Rated dissipation	P_{70}	0.07W	0.10W		P_{70} 70℃以下额定功率
Operating voltage	U_{max}	200V _{AC}	250V _{AC}		U_{max} 最大工作电压
Max short time overload voltage	400V _{AC}		500V _{AC}		最大短时间过载电压
Operating temperature range	-55℃ to 125℃				工作温度范围
Dimension	±0.3mm	L=3.5; D=1.3			±0.3mm 外型尺寸
	mm	K≥0.6; D ₁ ≥D-0.2			mm
Soldering pad (recommended)	mm	S=1.5; W=2; H=2.2			mm 建议焊盘尺寸
Outlines					外观 
Minimun packing quantity	3000		2000		最小包装数量
Average mass	mg	22	80		mg 平均重量
Standard applied	Q/SLC009-2010; GB/T5729-1994; GB/T9546-1995; GB/T9547-1995				技术标准